# METEORA

made in HOLLAND

INTER NOVA
PROFESSIONAL LIGHTING






| | |
|---|---|
| **Housing** | Aluminium, die cast |
| **Fixture type** | 3-phase track light |
| **Module** | Bridgelux V10 LED |
| **Driver** | TRIAC dimmable driver |
| **Lumen output** | 1100lm |
| **CCT** | 2700K, 3000K |
| **CRI** | >90Ra |
| **Beam angles** | 15º, 24º, 40º |
| **Adapter** | Powergear® 3-phase adapter included |
| **Rotatable** | 350º |
| **Tiltable** | 90º |
| **Expected Lifetime** | >50.000h (L90/B50) |
| **Photobiological safety** | RG1 unlimited |
| **Power factor** | > 0.9 |
| **UGR** | < 19 |
| **Colour consistency** | 3 SDCM |
| **Warranty** | 5 years warranty on LED module and driver |

| Net Weight | Dimensions carton L x W x H | Qty outer carton |
|---|---|---|
| 491 grams | 8 x 7 x 24 cm | 24 |

## LED MODULES

Standard

## OPTIONS

Dimmable




Casambi



## LED MODULE OPTIONS

| Description | Lumen | Watt | Lm/W | CCT | CRI | Description | Lumen | Watt | Lm/W | CCT | CRI |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Bridgelux V10 | 1100Lm | 15W | 73 | 927, 930 | >90Ra | | | | | | |

LED modules
Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K
Premium White (PW): for fresh white and depth of colour in retail environments
[1]) Lumen output of LED module (COB)
[2]) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.
The power of the complete fixture will be slightly higher due to the power consumption of the driver.
[3]) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.
Technical data can be changed by Internova without prior notice.

**It all starts with** light

# METEORA

made in HOLLAND

INTER NOVA
PROFESSIONAL LIGHTING

## ARTICLE CODE STRUCTURE

IN66 □□□□□□

**Lumen output:**
**11** 1100lm

**Beam angle:**
**15** 15º
**24** 24º
**40** 40º

**Light colour:**
**92** 927
**93** 930

**Colour:**
**3** White
**2** Black

**Ring Colour:**
**B** Black
**W** White
**G** Gold

**Options:**
**/DL** DALI dimmable (3-phase)
**/CAS** Casambi dimmable

## POLAR DIAGRAMS

15º

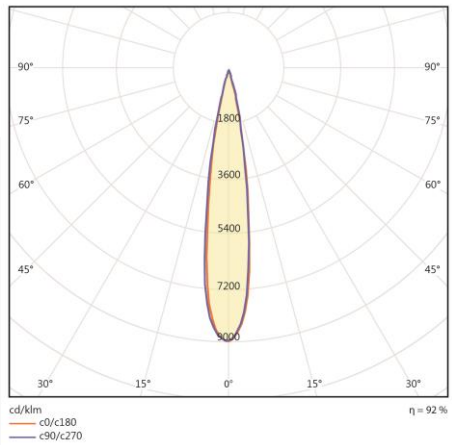


24º

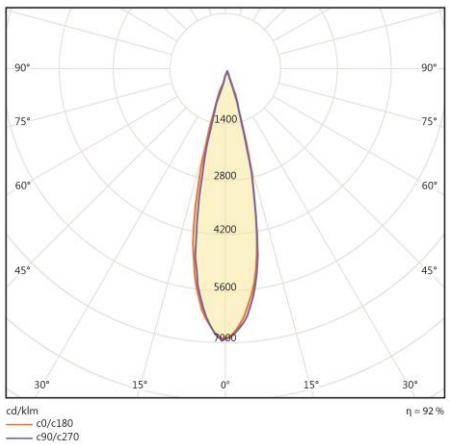


40º

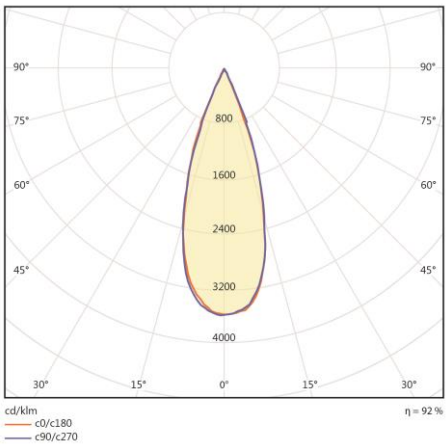


**It all starts with** light