METEORA-S

made in HOLLAND

INTER NOVA
PROFESSIONAL LIGHTING

SEMI-RECESSED





Housing	Aluminium, die cast
Fixture type	3-phase track light
Module	Bridgelux V6 LED
Driver	TRIAC dimmable driver
Lumen output	500lm, 700lm
CCT	2700K, DTW (3000K-2000K)
CRI	>90Ra
Beam angles	15º, 24º, 40º
Rotatable	350º
Tiltable	90º
Cut out size	⌀70 x 45mm
Expected Lifetime	>50.000h (L90/B50)
Photobiological safety	RG1 unlimited
Power factor	> 0.9
UGR	< 19
Colour consistency	3 SDCM
Warranty	3 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
356 grams	8 x 7 x 24	24

LED MODULES

Standard DTW



OPTIONS

LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Bridgelux V6	700Lm	8W	73	927	>90Ra						
Bridgelux V6 DTW	500Lm	8W	73	3000K-2000K	>90Ra						

LED modules
Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K
Premium White (PW): for fresh white and depth of colour in retail environments
[1]) Lumen output of LED module (COB)
[2]) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.
The power of the complete fixture will be slightly higher due to the power consumption of the driver.
[3]) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.
Technical data can be changed by Internova without prior notice.

It all starts with light

METEORA-S

made in HOLLAND

INTER NOVA
PROFESSIONAL LIGHTING

SEMI-RECESSED

ARTICLE CODE STRUCTURE

IN47 □□□□□□

Lumen output:
07 700Lm
05 500Lm (DTW)

Beam angle:
15 15º
24 24º
40 40º

Light colour:
92 927
DTW Dim-to-Warm

Colour:
3 White
2 Black

Ring Colour:
B Black
W White
G Gold

POLAR DIAGRAMS

15º

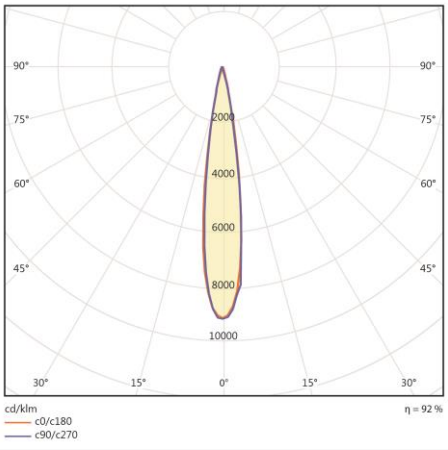

24º

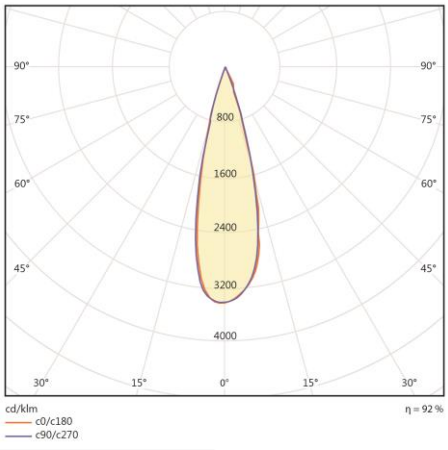

40º

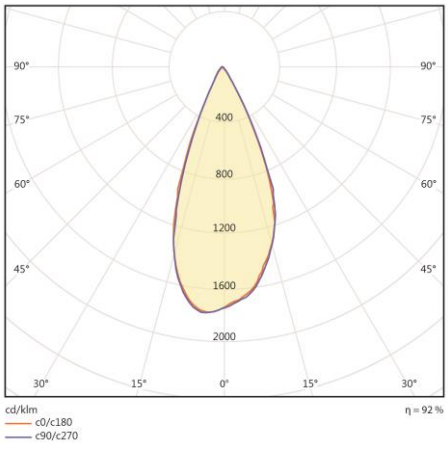

It all starts with light